



## DARA L Box

### IoT Device

#### Description

DARA Lighting is a Bluetooth and Wi-Fi enabled solution that makes light control and personalization a breeze. The solution is embedded in our compact DARA L Box devices and allows you to individually control each luminaire. No additional cabling or switches are needed. DARA Lighting comes with a smartphone application.



The solution is highly flexible, suitable for any type of business – from small offices to the largest retailers. With DARA Lighting, any business has the power to tailor its lighting preferences and reduce its energy expenses by making sure light is present only when needed.

#### Features & Benefits

- Low size, easy to install on a DALI luminaire
- Communication via BLE, BLE Mesh
- Controls up to 64 luminaires
- 5-year guarantee

#### Applications & References

Indoor | Office | Retail | Industrial & Logistic

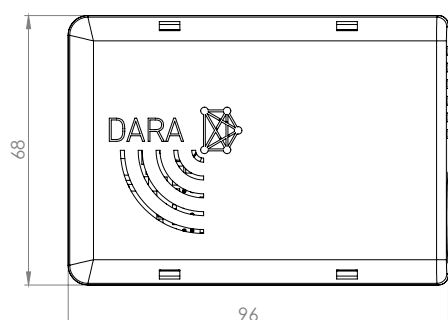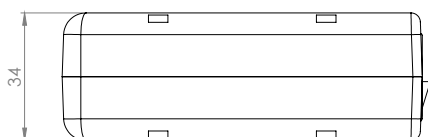

**Specifications/Technical Data**

---

Dimensions	96x68x34 mm
Power consumption	1.25W (Idle 1.2W)
Housing materials	ABS
IK Code	IK02
THD (at 230 V, 50 Hz, full load)	<5%
Protection class	Safety class II
Operating temperature [°C/F]	-20°C ...+50°C / -4F ... +122F
Operating humidity [%]	10 ÷ 80
AC Input [Vac]	220 Vac
Housing color	White
IP Rating	IP20
Control option	DALI-ECO(Max 64 lamps)
Warranty [years]	5 years
Storage Temperature Range [°C/F]	-20°C ... +55°C / -4F ... +131F

**Product code**

---

28103008 DARA L BOX/Core&amp;LightingExt/V.01/W